

POMF 1A  
POMF 2A  
POMF 10A  
POMF 25A  
POMF 90A  
POMF 0A

**FSI**

## POLYMICRO<sup>®</sup> MICROFIBER FILTER BAG

MICROFIBER OFFERS PRODUCT CLEANLINESS,  
HIGH THROUGH-PUT AND SERVICE LIFE.



# POLYMICRO<sup>®</sup> MICROFIBER FILTER BAG

## FEATURES

Extractible Free Fibers

80% + Void Volume  
Lightweight

Hydrophobic Surface

Compacts To Small Volume  
Or Incinerable

Dimensionally Stable Media

Polypropylene

## BENEFITS

Non-Foaming.  
Ideal For Food, Beverage, Water,  
Chemicals and Coatings.

Long Service Life  
High Contaminant Loading  
Reduced Waste Loads.

Will Absorb Oil From Air,  
Gas & Aqueous Streams.

Reduces Disposal Cost.

Consistent Performance

Broad Range Of Chemical  
Resistance.


## MICRON RATINGS

1	25
2	90
10	OA - Special purpose 25 micron

## MATERIAL

Polypropylene

## POLYLOC<sup>®</sup> SNAP-FIT POSITIVE SEAL

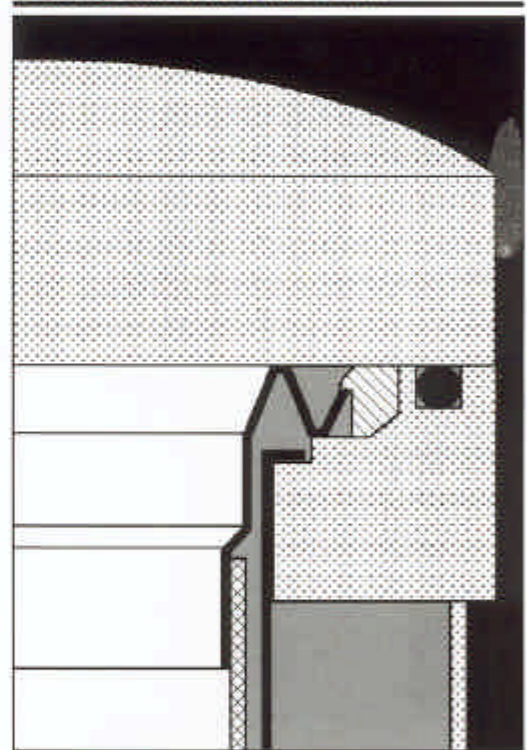

Hermetic seal of filter bag within housing to prevent liquid bypass.

STANDARD BAG SIZE	COLLAR	OPTIMUM FLOW RATES
#1 7" x 16"	POLYLOC	65 GPM
#2 7" x 32"	OR	125 GPM
#3 4" x 9"	STEEL SNAP RING	20 GPM
#4 4" x 14"		35 GPM

Differential Pressure: 35 PSIG Maximum  
10-15 PSIG Recommended Change-Out  
1-3 PSIG Initial

Operating Temperatures: Maximum Continuous - 200°F



**INTERNATIONAL**  
FSI INTERNATIONAL SERVICES LTD

### Postal Address

4535 - 8A Street NE  
Calgary, Alberta, Canada  
T2E 4J6

### Telephone

(403) 571-4225  
(888) 571-4225 (Toll Free - Canada)  
+1 403 571 4225 (International)

### Electronic Mail

General Information: info@fsi-international.com  
Website: www.fsi-international.com